

# STARPOWER

SEMICONDUCTOR

**FRED**

## FD300DGS60D6S

**600V/300A 1 in one-package**

### General Description

STARPOWER Diode Power Module provides low Forward voltage as well as low reverse recovery loss. They are designed for the applications such as SMPS.

### Features


- Fast soft diode
- Low forward voltage drop
- Small temperature coefficient
- Low reverse recovery losse
- High ruggedness
- Low inductance
- Isolated copper baseplate using DBC technology



### Typical Applications

- SMPS
- PFC
- Welding machine

### Equivalent Circuit Schematic

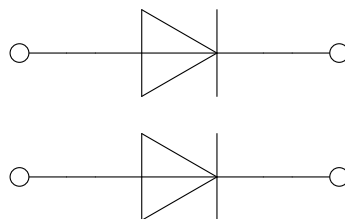

**Absolute Maximum Ratings**  $T_C=25^{\circ}\text{C}$  unless otherwise noted**Diode**

Symbol	Description	Value	Unit
$V_{RRM}$	Repetitive Peak Reverse Voltage	600	V
$V_{RSM}$	Non-repetitive Peak Reverse Voltage	650	V
$I_F$	Diode Continuous Forward Current	300	A
$I_{FSM}$	Surge Forward Current $V_R=0\text{V}, t_p=10\text{ms}, T_j=150^{\circ}\text{C}$	3000	A
$I^2t$	$I^2t$ -value $V_R=0\text{V}, t_p=10\text{ms}, T_j=150^{\circ}\text{C}$	45000	$\text{A}^2\text{s}$
$P_D$	Maximum Power Dissipation @ $T_j=175^{\circ}\text{C}$	534	W

**Module**

Symbol	Description	Value	Unit
$T_{jmax}$	Maximum Junction Temperature	175	$^{\circ}\text{C}$
$T_{jop}$	Operating Junction Temperature	-40 to +150	$^{\circ}\text{C}$
$T_{STG}$	Storage Temperature Range	-40 to +125	$^{\circ}\text{C}$
$V_{ISO}$	Isolation Voltage RMS, $f=50\text{Hz}, t=1\text{min}$	2500	V


**Diode Characteristics**  $T_C=25^{\circ}\text{C}$  unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$V_F$	Diode Forward Voltage	$I_F=300\text{A}, T_j=25^{\circ}\text{C}$		1.55	1.95	V
		$I_F=300\text{A}, T_j=125^{\circ}\text{C}$		1.50		
		$I_F=300\text{A}, T_j=150^{\circ}\text{C}$		1.45		
$Q_r$	Recovered Charge			13.0		$\mu\text{C}$
$I_{RM}$	Peak Reverse Recovery Current	$V_R=300\text{V}, I_F=300\text{A},$ $-di/dt=6500\text{A}/\mu\text{s}, T_j=25^{\circ}\text{C}$		190		A
$E_{rec}$	Reverse Recovery Energy			3.40		mJ
$Q_r$	Recovered Charge			24.0		$\mu\text{C}$
$I_{RM}$	Peak Reverse Recovery Current	$V_R=300\text{V}, I_F=300\text{A},$ $-di/dt=6500\text{A}/\mu\text{s}, T_j=125^{\circ}\text{C}$		235		A
$E_{rec}$	Reverse Recovery Energy			6.20		mJ
$Q_r$	Recovered Charge			28.0		$\mu\text{C}$
$I_{RM}$	Peak Reverse Recovery Current	$V_R=300\text{V}, I_F=300\text{A},$ $-di/dt=6500\text{A}/\mu\text{s}, T_j=150^{\circ}\text{C}$		250		A
$E_{rec}$	Reverse Recovery Energy			7.00		mJ


**Module Characteristics**  $T_c=25^{\circ}\text{C}$  unless otherwise noted

Symbol	Parameter	Min.	Typ.	Max.	Unit
$R_{\theta JC}$	Junction-to-Case			0.281	K/W
$R_{\theta CS}$	Case-to-Sink		0.15		K/W
M	Terminal Connection Torque, Screw M3	2.5		5.0	N.m
	Mounting Torque, Screw M3	2.5		5.0	
G	Weight of Module		35		g

**Circuit Schematic**

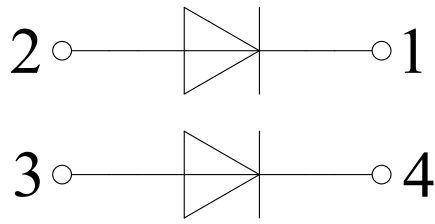

**Package Dimensions**

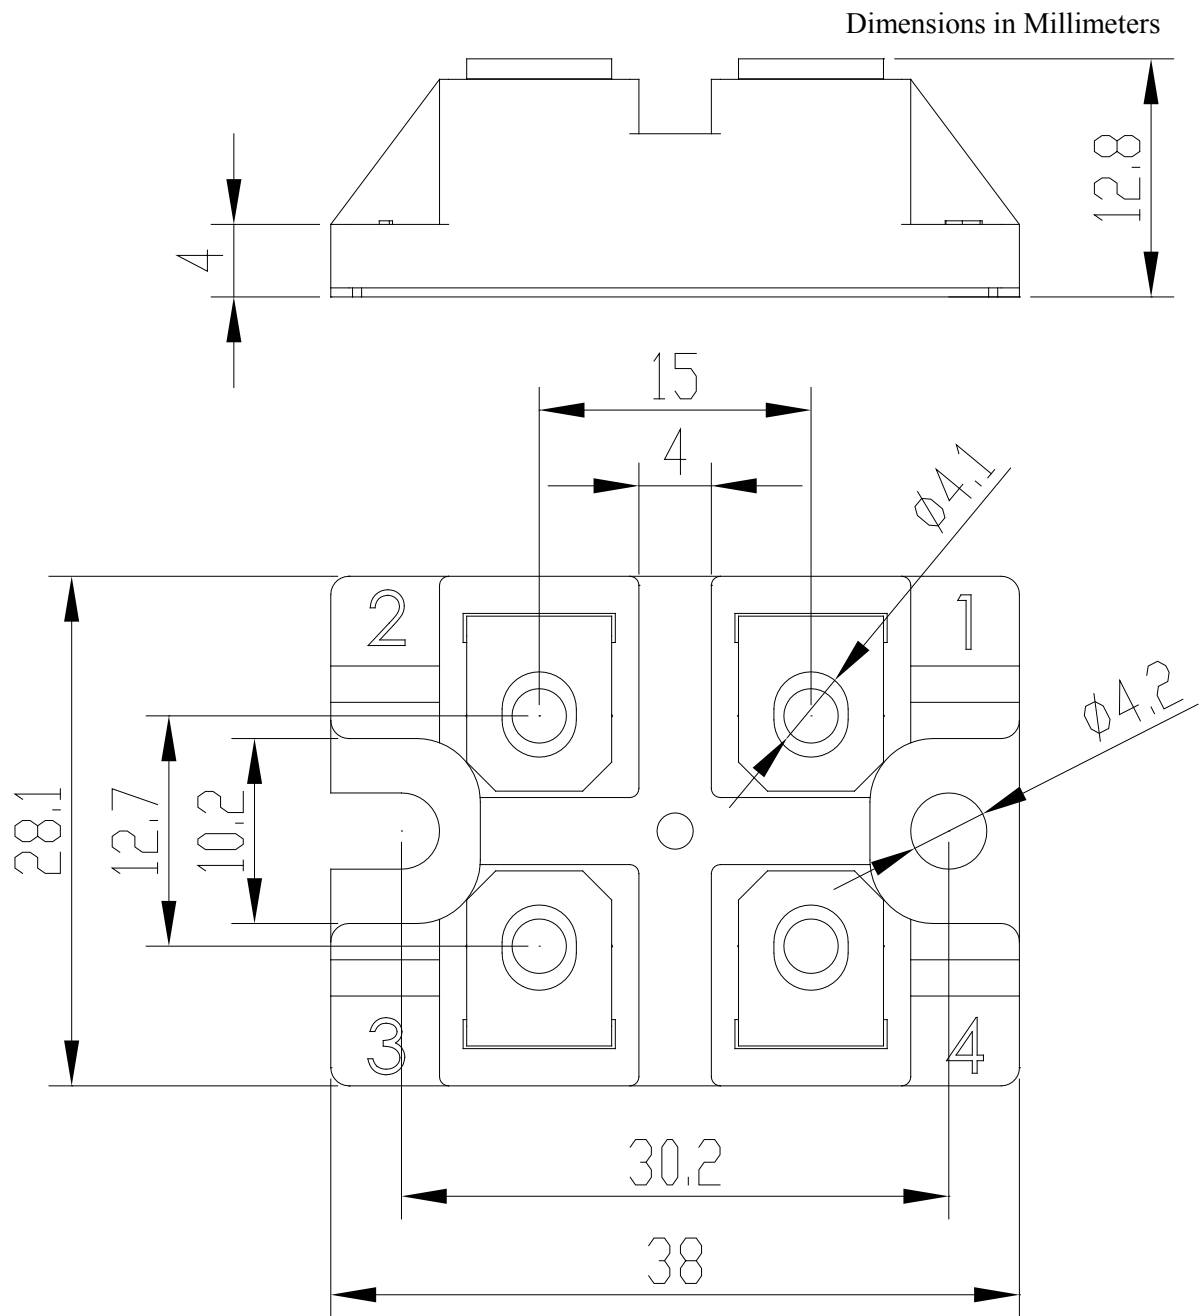

## Terms and Conditions of Usage

The data contained in this product datasheet is exclusively intended for technically trained staff. you and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see [www.powersemi.cc](http://www.powersemi.cc)), For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

If and to the extent necessary, please forward equivalent notices to your customers.  
Changes of this product data sheet are reserved.